


SPIKA MS300 SLIM

230 V / 50 Hz

MODULAR ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES
- ▶ HIGH EFFICIENT EVAPORATOR
- ▶ SMART WATER DISTRIBUTOR THAT IMPROVES DROP-OFF EFFICIENCY
- ▶ EASY ACCESS BY REMOVING THE PANELS WITH A SINGLE SCREWDRIVER
- ▶ SMART ELECTRONIC BOARD CONTROLS EVERY PARAMETER IN THE MACHINE AND SHOWS THE DIAGNOSIS OF POSSIBLE INCIDENCES
- ▶ HIGH RESISTANCE EXTERNAL FRAME IN AISI 304 STAINLESS STEEL

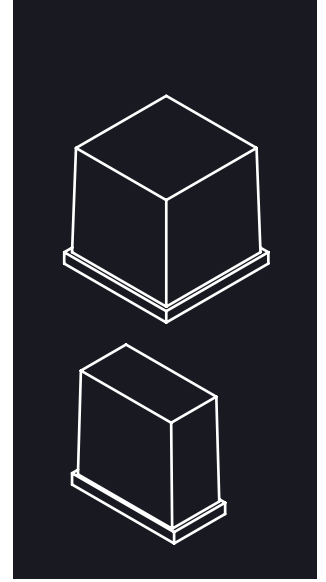

	 24 H	 10°C	 10°C	 21°C	 15°C	 (mm)	 (mm)	 SPIKA 6'5cc 23 mm (W) x 11 mm (D) x 26 mm (H)	 SPIKA 13cc 26 mm (W) x 23 mm (D) x 26 mm (H)
SPIKA MS300A SLIM		317	305	Width	559	Width	650	Average dimensions	
				Depth	621	Depth	710		
				Height	659	Height	795		

ACCESSORIES

INCLUDED



WATER INLET FILTER GASKET



WATER INLET HOSE



WATER OUTLET HOSE

NOT INCLUDED (OPTIONAL)



ANTI-LIMESCALE FILTER



PARTICLE FILTER



ANTI-LIMESCALE + ANTI-CHLORINE FILTER CS101


RECOMMENDED BINS




TECHNICAL SCHEME

SPIKA MS300 SLIM


RIGHT SIDE VIEW
VISTA LATERAL DERECHA




FRONTAL VIEW
VISTA FRONTAL



REAR VIEW
VISTA TRASERA

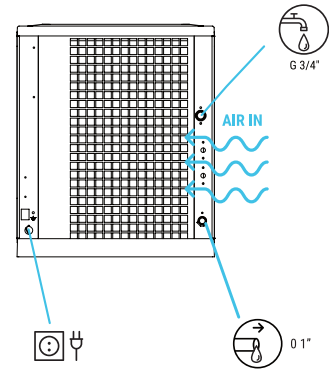

CENTRAL CROSS SECTION
VIEW OF THE BASE

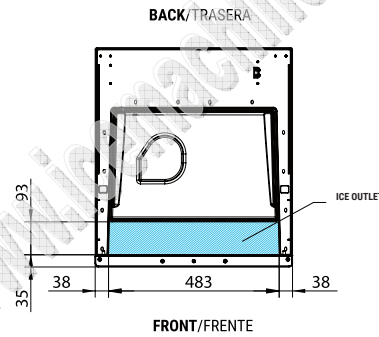

* All measurements in mm.

OPERATING CONDITIONS

PRODUCTION 50Hz

±10% V


10°C/43°C

5°C/38°C

1 bar/6 bar

240/480 Ice cubes/cycle

24 H ^{Kg} SPIKA MS300 S AIR COOLED



V	Hz	ph
230	50	1N

°C	10°	15°	21°	30°
°F	50°	60°	70°	86°
10°	317	315	290	270
50°				
21°	303	305	280	260
68°				
32°	275	270	251	230
90°				
43°	225	220	198	180
109°				

24 H ^{Kg} SPIKA MS300 S WATER COOLED

°C	10°	15°	21°	30°
°F	50°	60°	70°	86°
10°	-	-	-	-
50°				
21°	-	320	-	-
68°				
32°	-	-	-	-
90°				
43°	-	-	-	-
109°				

MODELS

SPIKA MS300 S A

ASHRAE CONDITIONS	ASHRAE CONDITIONS	ASHRAE CONDITIONS	ASHRAE CONDITIONS	ASHRAE CONDITIONS	FUSE	100 Kg	(l/h)	HEAT REJECTED	(Kg)	(Kg)	(m³)	
(W)	(BTU/h)	(W) 43°C	(n.)	(mm²)		(Kwh)	FULL HALF	(W)	(BTU/h)			
3.850	13.140	1.400	3	2,5	15	8,3	17,3 17,3	2.746	9.370	70,4	82	0,38