

SS 45 M R290



230 V / 50 Hz











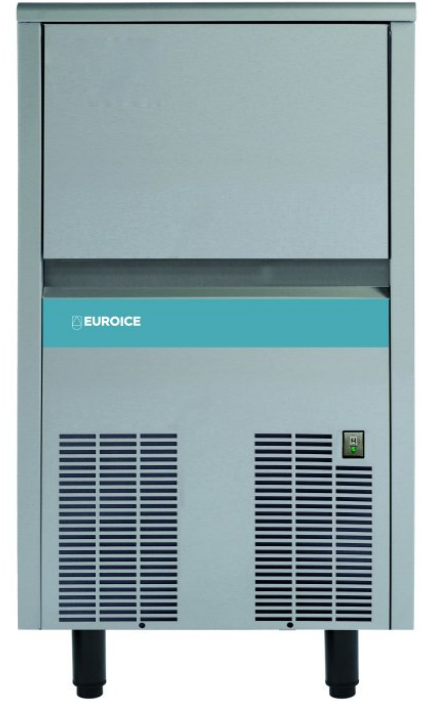

SELF-CONTAINED ICE CUBE MACHINE



FEATURES

- ▶ PRODUCES SOLID GOURMET CRYSTAL CLEAR ICE CUBES
- ▶ THE WATER-COOLED VERSION INCLUDES A DOUBLE WATER INLET TO AVOID WASTING DRINKING WATER AND EXTEND THE LIFE OF THE FILTERS.
- ▶ ELECTRONIC CONTROL THAT ENHANCES THE PERFORMANCE OF THE MACHINE AND ALLOWS IT TO ADAPT TO EXTREME CLIMATES
- ▶ A3S: ANTI-SCALE SPRAY SYSTEM. THE ITV PATENTED SPRAY SYSTEM WITH FLEXIBLE NOZZLES AVOIDS LIMESCALE DEPOSITS WITH SMALL VIBRATIONS
- ▶ SMART FRONT VENTILATION SYSTEM (SFVS) ALLOWS BUILT-IN INSTALLATION OF THE UNIT
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. ITS DESIGN WITHOUT SEALS PREVENTS FROM DETERIORATION IN HARD WATER
- ▶ ON/OFF LIGHTED ROCKER SWITCH / NEW PCB MOUNTED AT THE BOTTOM.
- ▶ AISI 304 STAINLESS STEEL BODY
- ▶ THE DISAPPEARING DOOR REDUCES THE FOOTPRINT OF THE MACHINE AND AVOIDS ACCIDENTS
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 12MM A 20MM
- ▶ NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION
- ▶ AN ANTI-LIMESCALE FILTER IS ADVISED IN HARD WATER AREAS (WATER HARDNESS OVER 30 °fH)



	 24 H	 10°C (Kg)	 10°C (Kg)	 21°C (Kg)	 15°C (Kg)	 STOCK (Kg)	 (mm)	 (mm)	
SS 45 M A		45	43	15	Width 435 Depth 605 Height 701*	Width 500 Depth 650 Height 830		SS M 22 Gr 35 (Ø) x 35 mm (H) Average dimensions	
SS 45 M W		47	45						


* WITH LEGS 806/856

ACCESSORIES

INCLUDED



NOT INCLUDED (OPTIONAL)

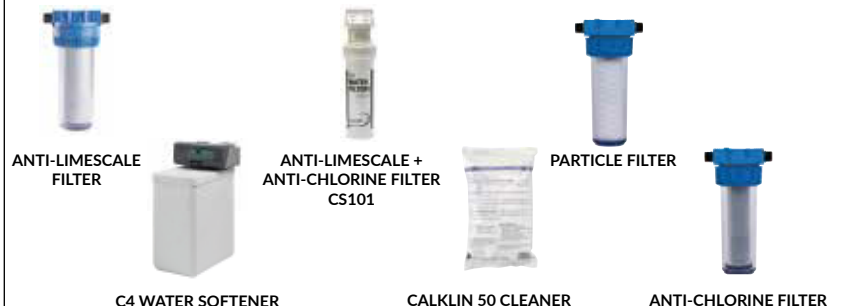


TECHNICAL SCHEME




SPRAY SYSTEM

SS 45 M


RIGHT SIDE VIEW

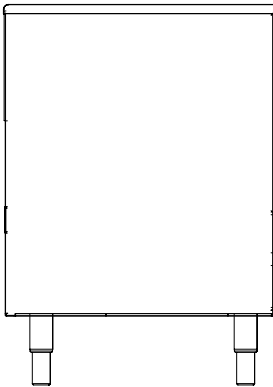


FRONTAL VIEW

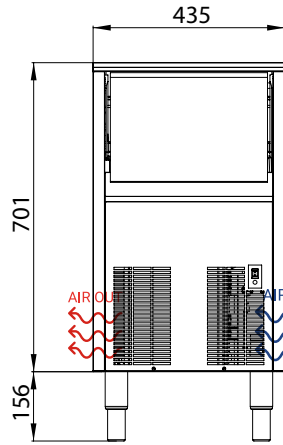

REAR VIEW

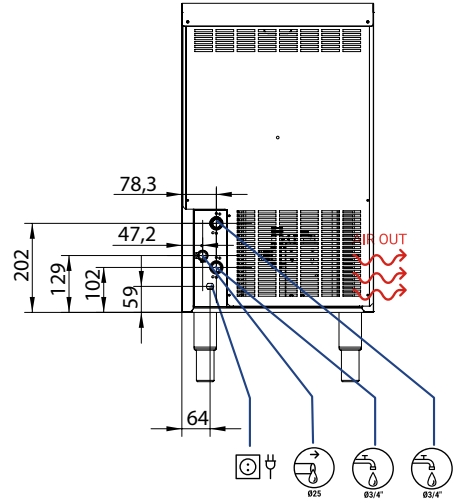

TOP VIEW

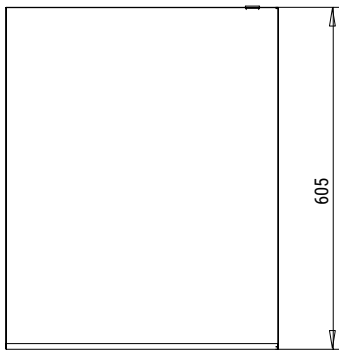

* All measurements in mm.

OPERATING CONDITIONS

PRODUCTION 50Hz


±10% V

5°C/43°C

5°C/35°C

1 bar/6 bar

24 Ice cubes/cycle



V	Hz	ph
230	50	1N



SS 45 M AIR COOLED

°C °F	10° 50°	15° 60°	21° 70°	30° 86°
	10° 50°	45	43	42
21° 68°	44	43	41	36
32° 90°	41	40	37	32
43° 109°	33	30	27	23



SS 45 M WATER COOLED

°C °F	10° 50°	15° 60°	21° 70°	30° 86°
	10° 50°	47	44	43
21° 68°	46	45	42	39
32° 90°	44	43	41	37
43° 109°	40	38	37	35

MODELS MODELOS

	+c° -c°	ASHRAE CONDITIONS (W) (BTu/h)	(W) 43°C	(n.) (mm²)	FUSE	100 Kg (Kwh)	(l/h)	HEAT REJECTED (W) (BTu/h)	(Kg)	(Kg)	(m³)
SS 45 M A		1.266 4.322	424	3 1,5	10	17,7	6	953 3.253	44	46	0,28
SS 45 M W		1.266 4.322	374	3 1,5	10	15,6	26,2	953 3.253	44	46	0,28

2 YEARS WARRANTY

Subject to certain limitations and exclusions. Only spare parts.

