

SS 60 M R290

230 V / 50 Hz

SELF-CONTAINED ICE CUBE MACHINE



FEATURES

- ▶ PRODUCES SOLID GOURMET CRYSTAL CLEAR ICE CUBES
- ▶ ELECTRONIC CONTROL THAT ENHANCES THE PERFORMANCE OF THE MACHINE AND ALLOWS IT TO ADAPT TO EXTREME CLIMATES
- ▶ A3S: ANTI-SCALE SPRAY SYSTEM. THE ITV PATENTED SPRAY SYSTEM WITH FLEXIBLE NOZZLES AVOIDS LIMESCALE DEPOSITS WITH SMALL VIBRATIONS
- ▶ SMART FRONT VENTILATION SYSTEM (SFVS) ALLOWS BUILT-IN INSTALLATION OF THE UNIT
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. ITS DESIGN WITHOUT SEALS PREVENTS FROM DETERIORATION IN HARD WATER
- ▶ ON/OFF LIGHTED ROCKER SWITCH / NEW PCB MOUNTED AT THE BOTTOM.
- ▶ AISI 304 STAINLESS STEEL BODY
- ▶ THE DISAPPEARING DOOR REDUCES THE FOOTPRINT OF THE MACHINE AND AVOIDS ACCIDENTS
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 105MM A 155MM
- ▶ NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION
- ▶ AN ANTI-LIMESCALE FILTER IS ADVISED IN HARD WATER AREAS (WATER HARDNESS OVER 30 °fH)



A3S
Anti-scale
spray
system














EASI
Easy
Access for
Service &
Installation



SILENT
RAIN



FRONT
VENTILATION

	 24 H	 10°C (Kg)	 10°C (Kg)	 21°C (Kg)	 15°C (Kg)	 STOCK (Kg)	 (mm)	 (mm)	
SS 60 M A		60	58	30	30	Width 515 Depth 645 Height 835*	Width 585 Depth 700 Height 965	SS M 22 Gr 35 (Ø) x 35 mm (H) Average dimensions	
SS 60 M W		64	65						

* WITH LEGS 940/990

ACCESSORIES

INCLUDED



WATER INLET HOSE



WATER OUTLET HOSE



4 HEIGHT ADJUSTABLE LEG



WATER INLET FILTER GASKET



SMALL SCOOP

NOT INCLUDED (OPTIONAL)



ANTI-LIMESCALE FILTER



C4 WATER SOFTENER



ANTI-LIMESCALE + ANTI-CHLORINE FILTER CS101



CALKLIN 50 CLEANER



PARTICLE FILTER




ANTI-CHLORINE FILTER




SS 60 M


LEFT SIDE VIEW




FRONTAL VIEW

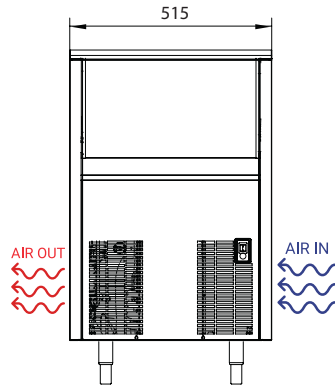

REAR VIEW

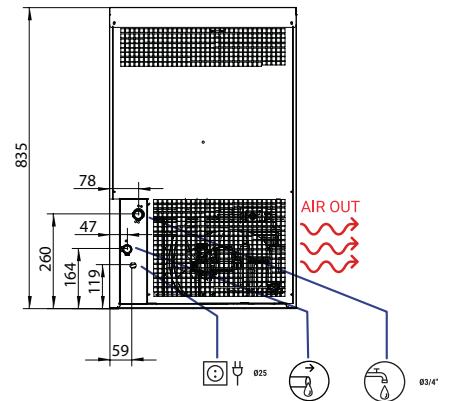

TOP VIEW



* All measurements in mm.

OPERATING CONDITIONS

PRODUCTION 50Hz


±10% V

5°C/43°C

5°C/35°C

1 bar/6 bar

36 Ice cubes/cycle



V	Hz	ph
230	50	1N

SS 60 M AIR COOLED

°C °F	10° 50°	15° 60°	21° 70°	30° 86°
	10°	60	59	55
50°				
21° 68°	62	58	54	48
32° 90°	56	53	49	42
43° 109°	45	40	35	28

SS 60 M WATER COOLED

°C °F	10° 50°	15° 60°	21° 70°	30° 86°
	10°	64	62	58
50°				
21° 68°	62	65	56	50
32° 90°	60	58	54	48
43° 109°	55	53	49	43

MODELS
MODELOS

	+c° -c°	ASHRAE CONDITIONS (W) (BTU/h)	(W) 43°C	(n.) (mm²)	FUSE	100 Kg (Kwh)	(l/h)	HEAT REJECTED (W) (BTU/h)	(Kg)	(Kg)	(m³)
SS 60 M A		1.266 4.322	484	3 1,5	10	14,6	7,1	953 3.253	54	58	0,40
SS 60 M W		1.266 4.322	380	3 1,5	10	13.7	32	953 3.253	54	58	0,40



Subject to certain limitations and exclusions. Only spare parts.

