


SS 135 M R290 230 V / 50 Hz












SELF-CONTAINED ICE CUBE MACHINE



FEATURES

- ▶ PRODUCES SOLID GOURMET CRYSTAL CLEAR ICE CUBES
- ▶ ELECTRONIC CONTROL THAT ENHANCES THE PERFORMANCE OF THE MACHINE AND ALLOWS IT TO ADAPT TO EXTREME CLIMATES
- ▶ A3S: ANTI-SCALE SPRAY SYSTEM. THE ITV PATENTED SPRAY SYSTEM WITH FLEXIBLE NOZZLES AVOIDS LIMESCALE DEPOSITS WITH SMALL VIBRATIONS
- ▶ SMART FRONT VENTILATION SYSTEM (SFVS) ALLOWS BUILT-IN INSTALLATION OF THE UNIT
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. ITS DESIGN WITHOUT SEALS PREVENTS FROM DETERIORATION IN HARD WATER
- ▶ ON/OFF LIGHTED ROCKER SWITCH / NEW PCB MOUNTED AT THE BOTTOM
- ▶ AISI 304 STAINLESS STEEL BODY
- ▶ THE DISAPPEARING DOOR REDUCES THE FOOTPRINT OF THE MACHINE AND AVOIDS ACCIDENTS
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 105MM A 155MM
- ▶ NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION
- ▶ AN ANTI-LIMESCALE FILTER IS ADVISED IN HARD WATER AREAS (WATER HARDNESS OVER 30 °fH)



	 24 H	 10°C (Kg)	 10°C (Kg)	 21°C (Kg)	 15°C (Kg)	 STOCK (Kg)	 (mm)	 (mm)	
SS 135 M A		138	134	60	Width 930 Depth 560 Height 915*	Width 1.000 Depth 630 Height 1.040	A	SS M 22 Gr 35 (Ø) x 35 mm (H) verage dimensions	
SS 135 M W		139	136						


* WITH LEGS 1.020/ 1.070

ACCESSORIES

INCLUDED




NOT INCLUDED (OPTIONAL)

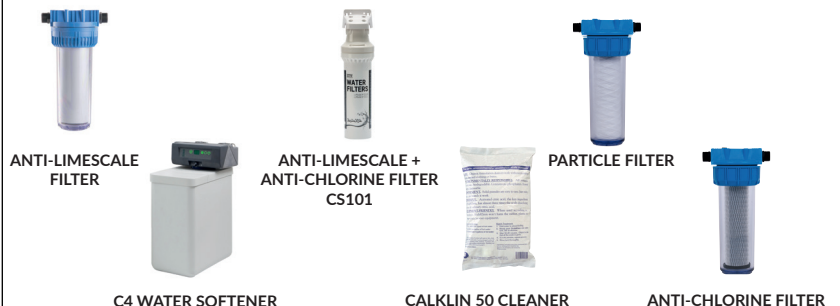




SS 135 M


LEFT SIDE VIEW




FRONTAL VIEW

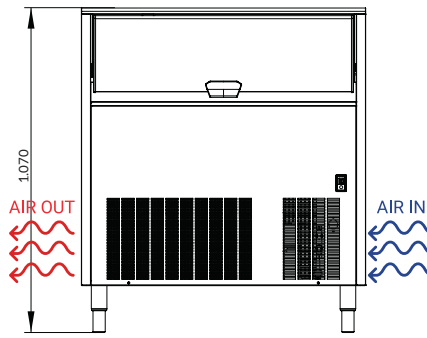

REAR VIEW

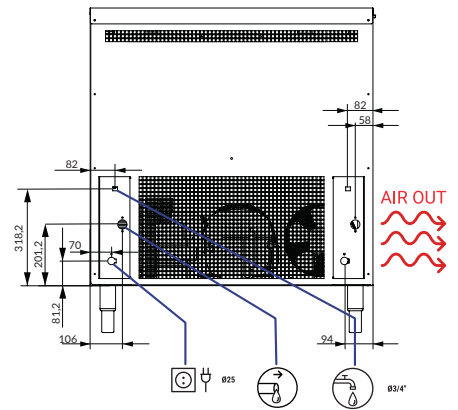

TOP VIEW

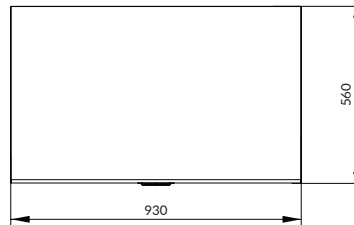

* All measurements in mm.

OPERATING CONDITIONS

PRODUCTION 50Hz


±10% V

5°C/43°C

5°C/35°C

1 bar/6 bar

72 Ice cubes/cycle



V	Hz	ph
230	50	1N

SS 135 M AIR COOLED

	°C			
	10°	15°	21°	30°
10°	138	135	128	125
50°	135	134	126	122
21°	131	128	122	118
68°	129	125	119	107
32°				
90°				
43°				
109°				

SS 135 M WATER COOLED

	°C			
	10°	15°	21°	30°
10°	138	136	131	127
50°	138	136	130	126
21°	133	130	128	121
68°	131	128	120	111
32°				
90°				
43°				
109°				

MODELS

MODELS	+c° -c°	ASHRAE CONDITIONS (W) (BTu/h)	(W) 43°C	(n.) (mm²)	FUSE	100 Kg (Kwh)	(l/h)	HEAT REJECTED (W) (BTu/h)	(Kg)	(Kg)	(m³)
SS 135 M A		2.292 7.825	940	3 1,5	16	19,1	14	1.747 5.964	83	104	0,66
SS 135 M W		2.292 7.825	-	3 1,5	16	-	-	1.747 5.964	83	104	0,66



Subject to certain limitations and exclusions. Only spare parts.



9001 14001

