



HOSHIZAKI

IM-24oANE-HC CUBE ICE MAKER

Product Description

The IM-24oANE-HC is HydroCarbon modular Cube Ice Maker. This machine can produce up to 235 kg per 24 hours and still use just 50 per cent of the legal allowance of HydroCarbon. It is possible to combine with all bins available.



- A closed water circuit offers the ultimate contamination protection, by reducing the number of points at which impurities can enter the ice making process.
- Hoshizaki ice makers are micro computer controlled, controlling the ice making process to perform at its best under varying circumstances, without having to make physical adjustments.
- A stainless steel exterior provides a hygienic and high quality finish.
- Automatic shutdown of a machine in case of leaking gas is ensured by installed leak detector.
- Foam injected polyurethane for insulation (HFC free), helps preserve the quality and consistency of the ice produced, reducing the number of production cycles.
- An easily cleanable air filter allows end users to carry out a routine cleaning schedule, extending product life expectancy and reducing the frequency and costs of maintenance call-outs.

Available Models

| |
|------------------------------|
| IM-24oANE-HC (Air cooled) |
| IM-24oANE-HC-23 (Air cooled) |

Ice Cubes

| Model | Size | Shape |
|--------------|---------------------------|-------|
| IM-24oANE-HC | Cube Approx. 28x 28x 32mm | |

Bins

| Model | Type of Bin | Max. Bin Capacity |
|-----------------------------------|-------------|-------------------|
| B-301SA | Modular | 144kg |
| B-501SA, Top Kit TK 8 D | | 217kg |
| B-801SA, Top Kit TK 8 D + TK 18 D | | 348kg |

Production

| Model | Ice Production per 24h | Temperature | Ice Production per Cycle | Water Consumption per 24h |
|--------------|--|--|--------------------------|--|
| IM-24oANE-HC | Approx. 235kg (15mm) / 210kg (5mm) Approx. 210kg (15mm) / 195kg (5mm) Approx. 190kg (15mm) / 170kg (5mm) | AT.10°C, WT.10°C AT.21°C, WT.15°C AT.32°C, WT.21°C | Approx. 3,2kg/140.pcs | Approx. 0,67m ³ Approx. 0,32m ³ Approx. 0,29m ³ |

Two year warranty

For more information visit our website at www.hoshizaki-europe.com
Hoshizaki Europe B.V. retains the right to change products and their specifications without prior notice.






HOSHIZAKI

IM-240ANE-HC CUBE ICE MAKER

IM-240ANE-HC

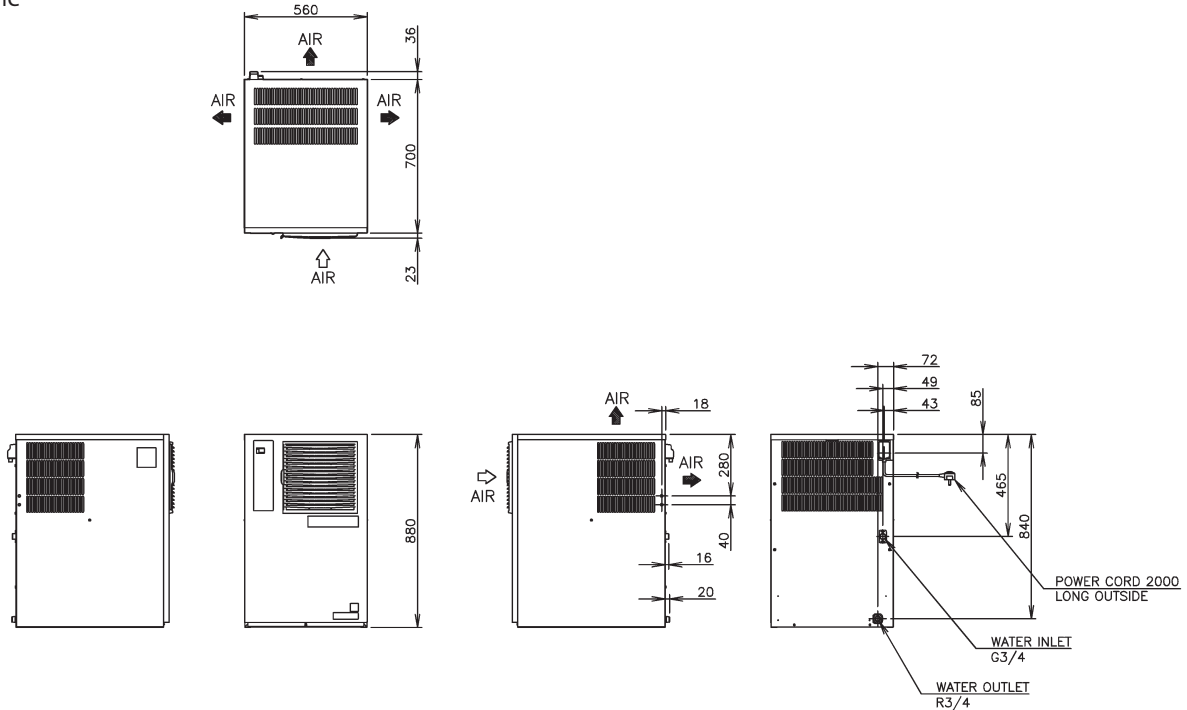

| Specification | IM-240ANE-HC |
|--|--|
| Ac Supply Voltage | 1 PHASE 220-240V 50Hz |
| Amperage (AT.32°C, WT.21°C) | 4.0A |
| Starting Amperage | 27A |
| Electric Consumption (AT.32°C, WT.21°C) | 930W |
| Freeze Cycle Time (AT.21°C, WT.15°C) | Approx. 24min |
| Exterior | Stainless Steel |
| Insulation Foam Blowing Agent | - |
| Connections - Electric | X-Type Con. |
| Connections - Water Supply | Inlet G3/4 (connected at rear side) |
| Connections - Drain | Outlet R3/4 (connected at rear side) |
| Ice Making System | Cell type |
| Harvesting System | Hot Gas Defrost |
| Condenser | Air-cooled, Spiral tube type |
| Heat Rejection (AT.32°C, WT.21°C) | 2330W |
| Evaporator | Copper Tube on Sheet and Cells |
| Refrigerant Control | Thermostatic Expansion Valve |
| Refrigerant Charge | R290/147g |
| Bin Control System | Microswitch with Time Delay |
| Ice Making Control System | Thermistor, Timer |
| Electrical Protection | Class I Appliance, 5A Fuse |
| Compressor Protection | Overload Protector (Auto- reset), Pressure Switch (Auto-reset) |
| Ice Maker Protection | Interlock by Controller Board |
| Dimensions Product excl. Packaging | 560 x 700 x 880 (W x D x H, mm) |
| Dimensions Product incl. Packaging | 820 x 665 x 1054 (W x D x H, mm) |
| Weight Gross / Net | 89kg / 78kg |

| Operation Conditions | |
|---------------------------------|-------------------------|
| Ambient Temperature | 1 - 40°C |
| Water Supply Temperature | 5 - 35°C |
| Water Supply Pressure | 0,07-0,78MPa (0,7-8bar) |

| Accessories |
|------------------|
| Scoop |
| Ice Chute |
| Installation Kit |