










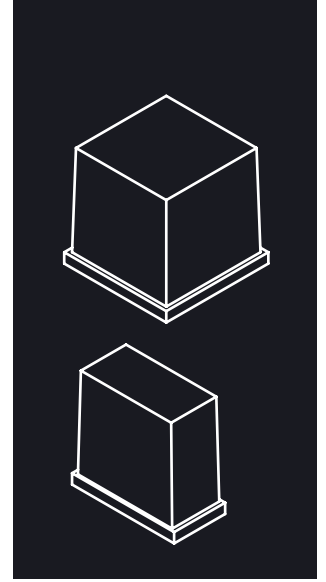


SPIKA MS410 THREE PHASE 400 V / 50 Hz

MODULAR ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES
- ▶ HIGH EFFICIENT EVAPORATOR
- ▶ SMART WATER DISTRIBUTOR THAT IMPROVES DROP-OFF EFFICIENCY
- ▶ EASY ACCESS BY REMOVING THE PANELS WITH A SINGLE SCREWDRIVER
- ▶ SMART ELECTRONIC BOARD CONTROLS EVERY PARAMETER IN THE MACHINE AND SHOWS THE DIAGNOSIS OF POSSIBLE INCIDENCES
- ▶ ENERGY STAR, LOW POWER CONSUMPTION CERTIFICATION
- ▶ HIGH RESISTANCE EXTERNAL FRAME IN AISI 304 STAINLESS STEEL



	 24 H 	 10°C  10°C	 21°C  15°C	 (mm)	 (mm)	
SPIKA MS410 A		424 (Kg)	405 (Kg)	Width 760 Depth 620 Height 762	Width 836 Depth 635 Height 874	SPIKA 6'5cc 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
SPIKA MS410 W		436 (Kg)	416 (Kg)			SPIKA 13cc 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions

ACCESSORIES

INCLUDED



WATER INLET FILTER GASKET



WATER INLET HOSE



WATER OUTLET HOSE

NOT INCLUDED (OPTIONAL)




ANTI-LIMESCALE FILTER



PARTICLE FILTER




ANTI-LIMESCALE + ANTI-CHLORINE FILTER CS101





STACKING KIT

RECOMMENDED BINS

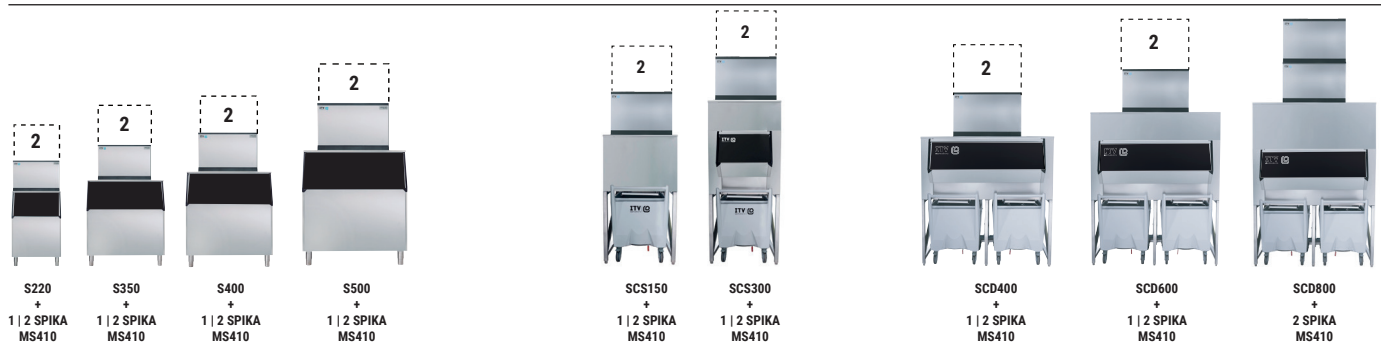

TECHNICAL SCHEME

SPIKA MS410

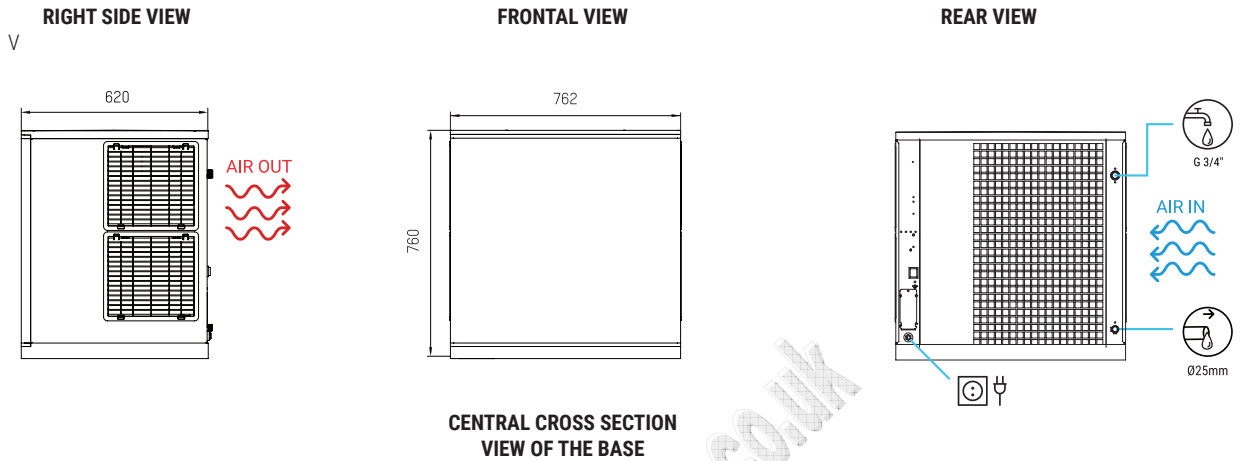

* All measurements in mm.

OPERATING CONDITIONS

PRODUCTION 50Hz


±10% V

10°C/43°C

5°C/38°C

1 bar/6 bar

400/800 Ice cubes/cycle



SPIKA MS410 AIR COOLED

°C	10°	15°	21°	30°
°F	50°	60°	70°	86°
10°	424	412	395	379
50°	413	405	386	368
21°	359	333	301	284
68°	293	259	232	217
32°				
90°				
43°				
109°				

SPIKA MS410 WATER COOLED

°C	10°	15°	21°	30°
°F	50°	60°	70°	86°
10°	436	423	406	389
50°	425	416	397	378
21°	369	342	310	291
68°	301	266	239	223
32°				
90°				
43°				
109°				

MODELS

MODELS	ASHRAE CONDITIONS (W) (BTU/h)	(W) 43°C	(n.) (mm²)	FUSE	100 Kg (Kwh)	(l/h) FULL HALF	HEAT REJECTED (W) (BTU/h)	(Kg)	(Kg)	(m³)
SPIKA MS410 A	11.185 38.185	1.540	3 2,5	15	9,9	17 17	3.505 11.960	105	110	0,53
SPIKA MS410 W	11.185 38.185	1.540	3 2,5	10	9,9	110 110	3.505 11.960	105	110	0,53

