



## Self Contained Ice Machine up to 30 kg



### Features

- Produces individual Gourmet crystal clear supercubes.
- Up to 30 kg (66 lb) daily ice cubes production.
- Up to 11 kg (24 lb) ice storage capacity.
- Push-button dispensing system: cubes drop directly into the consumer's glass, with no manipulation.
- Resistant stainless steel exterior.
- Simple and reliable electromechanic controls.
- Front access condenser air filter, removable and washable.
- Water system protected by patented anti-scale system.
- AgION antimicrobial agent embedded in moulded plastics parts.
- 2 years manufacturer warranty.
- R-134a CFC-free refrigerant.

### Technologies



Model	Compressor	24h						24h			Dimensions
		10°C: 10°C			21°C: 15°C			24h			
		[kg]	[lb]	N°	[kg]	[lb]	N°	[kg]	[lb]	N°	[WxDxH mm]
DXG 35 AS		30	66	1500	26	57	1300	11	24	550	380x515x1605
DXG 35 WS		29	64	1450	25	55	1250	11	24	550	[WxDxH inches] 15" x 20 9/32" x 63 3/16"

[V/Hz/ph]  
 230/50/1

R134a

This product qualifies for the following listings:



Medium Gourmet  
20 g



Ø 29 x H 34 mm


**2** Years Warranty

Subject to certain limitations and exclusions

Models and specifications are subject to change without notice.

Certified ISO 9001

## Self Contained Ice Machine up to 30 kg

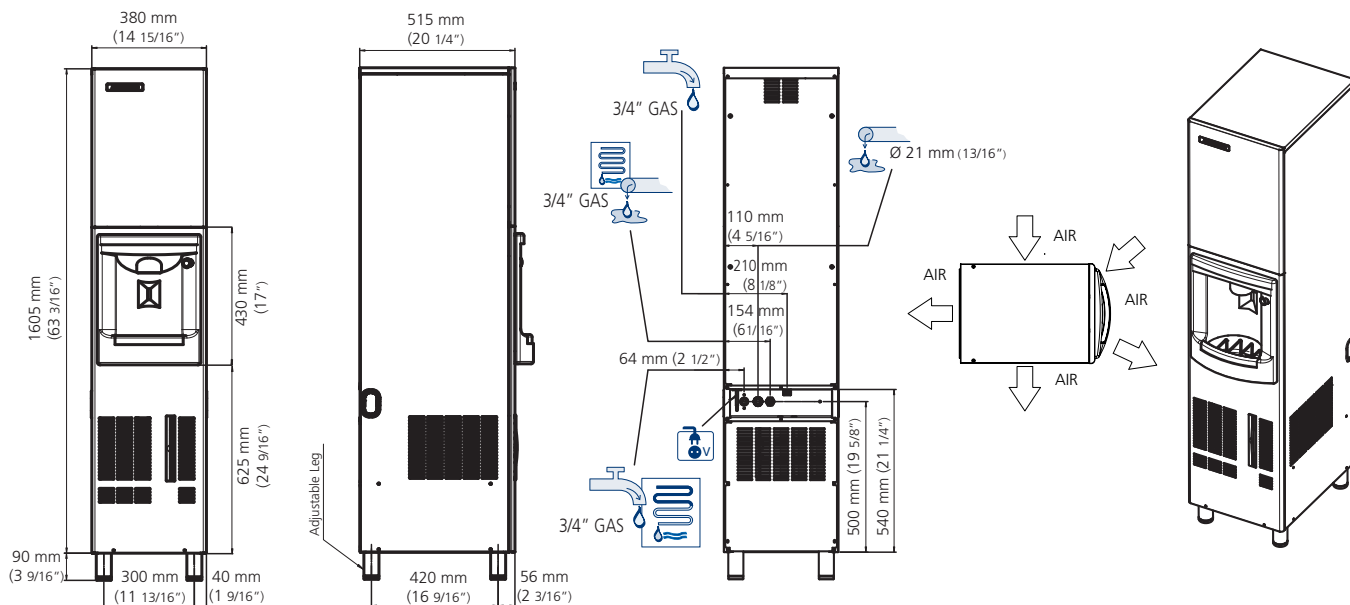

### DXG AIR COOLED

°C \ °F	°F				kg
	50°	60°	70°	90°	
10°	29	27	25	21	kg
50°	64	60	55	46	lb
21°	27	25	23	19	kg
70°	60	55	51	42	lb
32°	15	15	15	15	kg
90°	33	33	33	33	lb
38°	12	12	12	12	kg
100°	26	26	26	26	lb



### DXG WATER COOLED

°C \ °F	°F				kg
	50°	60°	70°	90°	
10°	30	29	27	24	kg
50°	66	64	60	53	lb
21°	28	26	25	22	kg
70°	62	57	55	49	lb
32°	22	22	21	20	kg
90°	49	49	46	44	lb
38°	21	20	20	19	kg
100°	46	44	44	42	lb



Minimum

10°C (50°F)



5°C (41°F)

-10%

1 bar  
14 psi



Maximum

43°C (104°F)

38°C (100°F)

+10%

5 bar  
70 psi

Model	Compressor	Capacity [Btu/h] [W]	Condenser [Ømm <sup>2</sup> ]	Power [W]	FUSE	Energy [kWh] - 100 kg	Water [l/h] [gal/h]	Weight [kg] [lb]	Dimensions [kg] [lbs]
DXG 35 AS		2700 790	3x1,5	300	10 A	46.6	2,7 1.6	51 112	60 132
DXG 35 WS		2700 790	3x1,5	300	10 A	30,0	41,7 11	51 112	60 132